
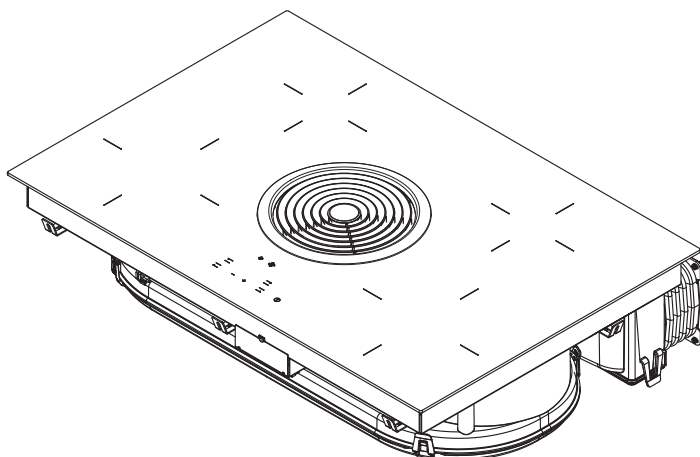
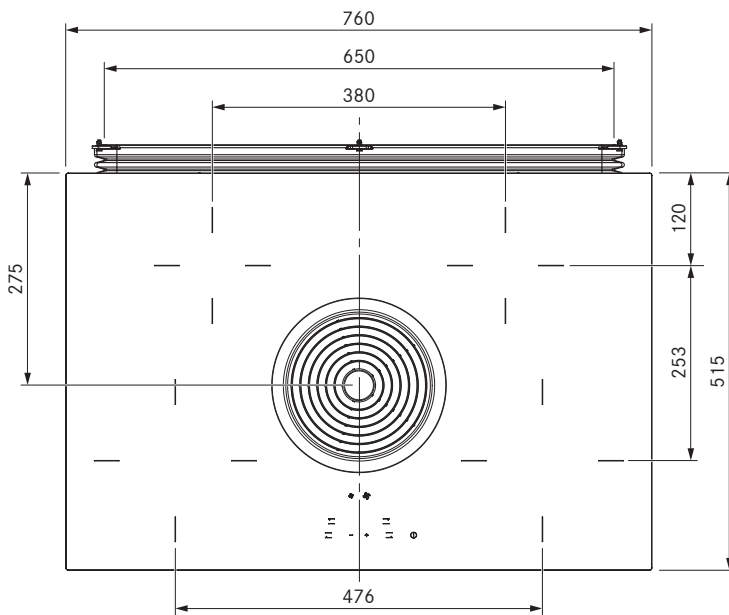
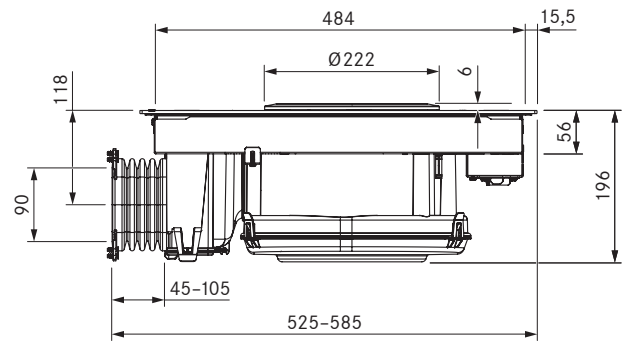


BHU

BORA Hyper glass ceramic cooktop with cooktop extractor – recirculation

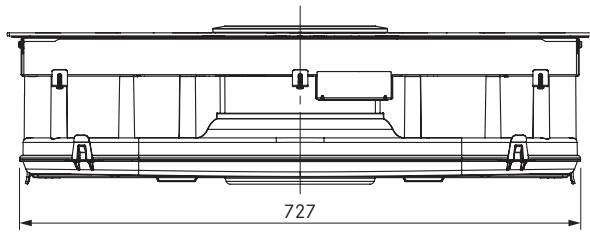

BORA Hyper glass ceramic cooktop with cooktop extractor – recirculation

Technical data	
Supply voltage	380 – 415 V 2N/3N
Supply voltage	220 – 240 V
Frequency	50 Hz
Maximum power consumption	7.0 kW
Fuse protection / power supply	3 x 16 A
Fuse protection / power supply	2 x 16 A
Fuse protection / power supply	1 x 32 A
Weight (incl. accessories/packaging)	25 kg
Surface material	SCHOTT CERAN®
Dimensions (WxDxH)	760 x 515 x 196 mm
Cooktop	
Power levels	1 – 9, P
Front cooking zone size	Ø 210 mm
Front cooking zone power	2300 W
Front cooking zone power setting	3000 W
Rear cooking zone size	Ø 140 mm
Rear cooking zone power	1200 W
Extraction system	
Maximum air volume	624 m ³ /h
Maximum static pressure	341 Pa
Power levels	1, 2, P
Recirculation connection	650 x 90 mm
Filter medium	Activated charcoal filter with ion exchanger
Material	Filter panel with fine filter
Filter area	2 x 0.4 m ²
Service life	Max. 150 h / 1 year

Cooktop
<ul style="list-style-type: none"> ■ Power setting for the front left cooking zone (Hyper cooking zone) ■ Automatic cut-off ■ Timer function ■ Residual heat display ■ Automatic heat-up function ■ Heat retention function ■ Childproofing feature

Exhaust system
<ul style="list-style-type: none"> ■ Touch-operated power control ■ Automatic after-run ■ Automatic cut-off ■ Filter service display

Scope of delivery
<ul style="list-style-type: none"> ■ Hyper glass ceramic cooktop with BHU cooktop extractor ■ Stainless steel grease filter ■ BAKFS activated charcoal filter set ■ Flexible duct with fixing screws ■ Mounting straps ■ Sealing tape ■ Glass ceramic scraper ■ Cable routing clips ■ Height adjustment plate set ■ Operating and installation instructions

Planning instructions
<ul style="list-style-type: none"> ■ Basic cooktop extractor system can be combined with the sockets USTF, USTE, USTJ, USTG and USTL

Accessories
<ul style="list-style-type: none"> ■ BAKFS activated charcoal filter set ■ BFF stainless steel grease filter ■ BLED 1 air inlet nozzle ■ BUSAE exhaust air conversion set ■ UDB25 sealing tape ■ BKR760 cooktop frame

- The connection cable must be provided at the installation site
- Front power socket

Duct connection dimensions:

BHU with flexible duct

